



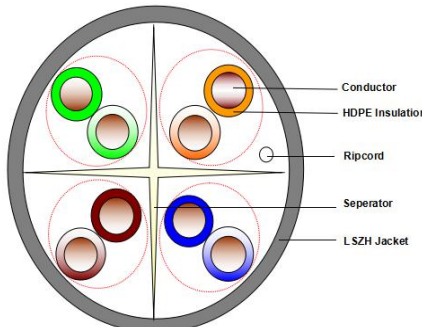
INTEGRITY CABLE CO LIMITED

Address: Building B,C,H,I, No.30 , The Third Industrial Area, Xiacun, No.102 Matian North Road, Gongming Office, Guangming New District, Shenzhen,China

DL:+86-755-33506313

Fax: +86-755-33266395

www.iti-link.com

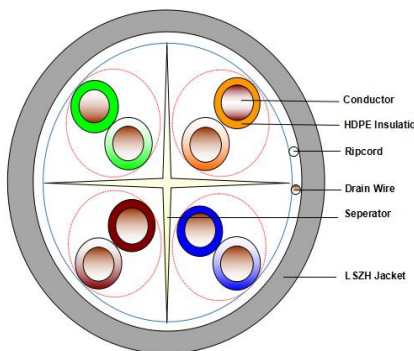
CQ: INDOOR UTP CAT6 4X2X0.57 CCA LSZH			P/O No.	ITIYW011190111002
ITEM		SPECIFICATION	CONSTRUCTION D.E.G	
CONDUCTOR	AWG	23AWG		
	MATERIAL	CCA (15%CU)		
	COND.SIZE	4X2X0.57mm±0.01		
INSULATION	MIN.AVG.THICK	0.2-0.22MM		
	MATERIAL	HDPE		
	OD/	0.98±0.01mm		
PAIRED PITCH	Blue / Blue&white	16mm	NETWORK CABLE CAT6 UTP 4 PAIR 23 AWG CCA LSZH ANSI/EIA/TIA 568B 001-305M	
	Orange / Orange &white	12mm		
	Green / Green&white	14mm		
	Brown / Brown&white	18mm		
RIP CORD	MATERIAL	Twisted Nylon		
SEPERATOR	MATERIAL	PE Speperator	Inner box	38x38x24CM
PVC JACKET	MIN.AVG.THICK	0.60MM	Outer Carton	50X40X40CM
	MATERIAL	LSZH	Integrity Cable Co., Ltd Address:Building B,C,H,I, No.30 , The Third Industrial Area, Xiacun, No.102 Matian North Road, Gongming Office, Guangming New District, Shenzhen,China TEL: 86-755-33506313 FAX: 86-755-33266395	
	COLOR	GREY		
	OD	5.8±0.02MM		
PERFORMANCE	1. Conductor ResistanceΩ/100m.20℃	≤18Ω		
	2. Conductor allow load current(A)	0.5A		
	3. Voltage Rating(V)	≤30V		
	4. Operating Temperature(℃)	≤75℃		
STANDARDS	TIA/EIA 568 B.2-1			
PHYSICAL MECHANICAL PROPERTIES	1. Conductor elongation: ≥ 10%		CQ FILE NO.: CQ-UTP-4P-057 CCA	
	2. Tensile strength of isulation: ≥ 16Mpa			
	3. Insulation elongation: ≥400%			
	4. Insulation Resistance:500 M OHM / km min at 500 V DC			
	5. Tensile strength of sheath: ≥20Mpa			
	6. Sheath elongation: ≥150%,			
	7. Pulling Force:11.5 kg Max			
		CHECKED \$ PROVED		
		DRAWING		
		DATE	17th Jan.2019	



INTEGRITY CABLE CO LIMITED

Address: Building B,C,H,I, No.30 , The Third Industrial Area, Xiacun, No.102 Matian North Road, Gongming Office, Guangming New District, Shenzhen,China

DL:+86-755-33506313 Fax: +86-755-33266395 www.iti-link.com

CQ: INDOOR UTP CAT6 4X2X0.57 CCA LSZH			P/O No.	ITIYW011190111002
ITEM		SPECIFICATION	CONSTRUCTION D.E.G	
CONDUCTOR	AWG	23AWG		
	MATERIAL	CCA (15%CU)		
	COND.SIZE	4X2X0.57mm±0.01		
INSULATION	MIN.AVG.THICK	0.2-0.22MM		
	MATERIAL	HDPE		
	OD/	0.98±0.01mm		
PAIRED PITCH	Blue / Blue&white	16mm	NETWORK CABLE CAT6 UTP 4 PAIR 23 AWG CCA LSZH ANSI/EIA/TIA 568B 001-305M	
	Orange / Orange &white	12mm		
	Green / Green&white	14mm		
	Brown / Brown&white	18mm		
RIP CORD	MATERIAL	Twisted Nylon		
SEPERATOR	MATERIAL	PE Speperator	Inner box	38x38x24CM
Shield	MATERIAL 1	Mylar	Outer Carton	50X40X40CM
	MATERIAL 2	Al Foil		
Drain Wire	MATERIAL	1*0.40mm CCA		
PVC JACKET	MIN.AVG.THICK	0.60MM		
	MATERIAL	LSZH		
	COLOR	GREY		
	OD	5.8±0.02MM		
PERFORMANCE	1. Conductor ResistanceΩ/100m.20℃	≤18Ω	Integrity Cable Co., Ltd Address:Building B,C,H,I, No.30 , The Third Industrial Area, Xiacun, No.102 Matian North Road, Gongming Office, Guangming New District, Shenzhen,China TEL: 86-755-33506313 FAX: 86-755-33266395	
	2. Conductor allow load current(A)	0.5A		
	3. Voltage Rating(V)	≤30V		
	4. Operating Temperature(℃)	≤75℃		
STANDARDS	TIA/EIA 568 B.2-1			
PHYSICAL MECHANICAL PROPERTIES	1. Conductor elongation: ≥ 10%			
	2. Tensile strength of isulation: ≥ 16Mpa			
	3. Insulation elongation: ≥400%			
	4. Insulation Resistance:500 M OHM / km min at 500 V DC		CQ FILE NO.:	CQ-UTP-4P-057 CCA
	5. Tensile strength of sheath: ≥20Mpa		CHECKED \$ PROVED	
	6. Sheath elongation: ≥150%,		DRAWING	
	7. Pulling Force:11.5 kg Max		DATE	17th Jan.2019